


Seismic Retrofit for Cripple Walls

by Howard Cook

Adding plywood and framing hardware won't help unless it's installed how and where it will reinforce the building's weakest structural links

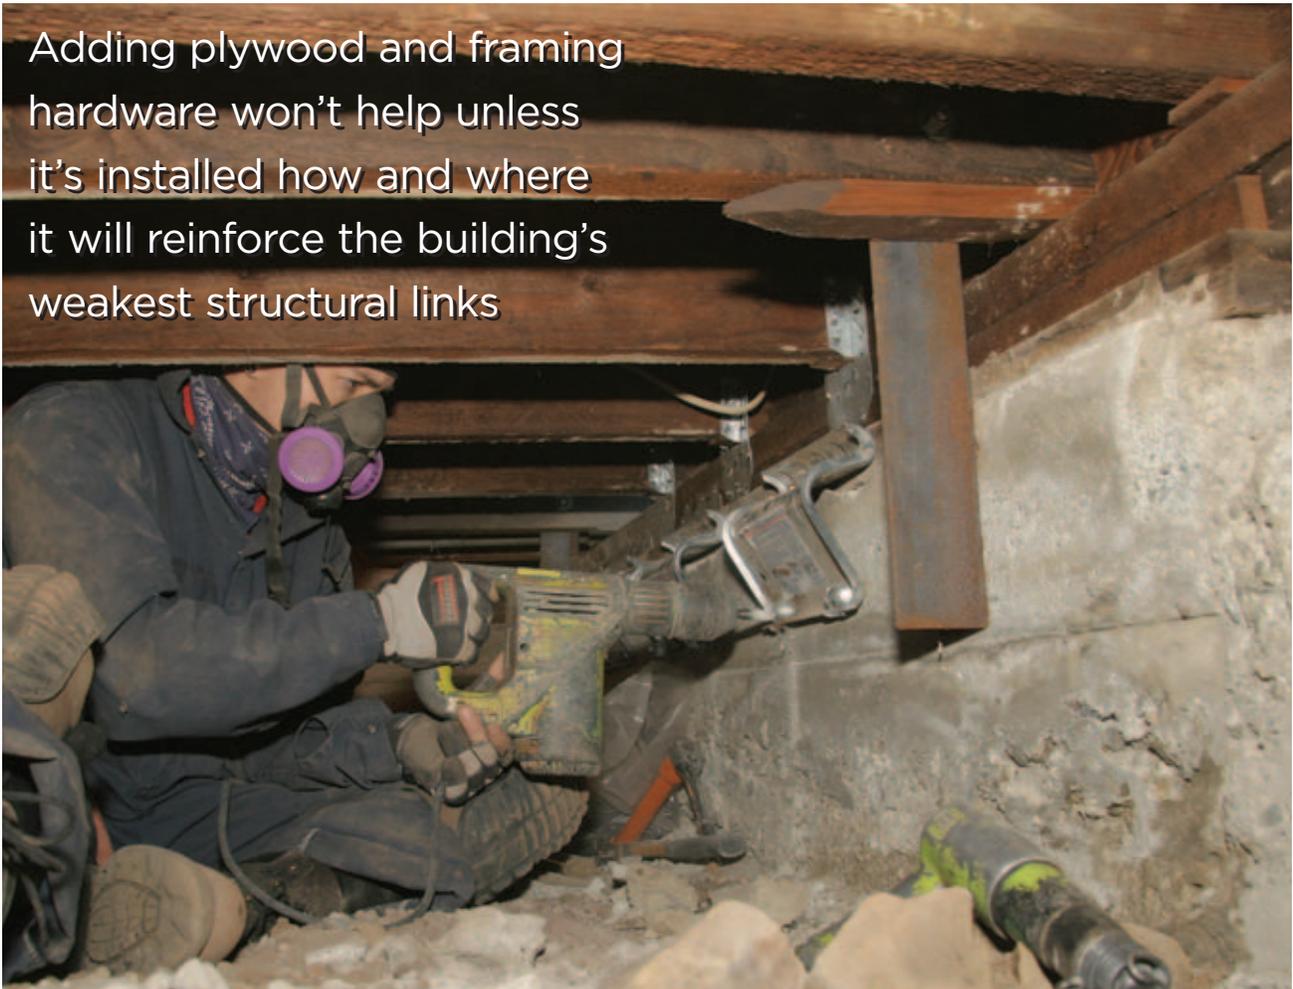

The Pacific coast of the United States is riddled with earthquake faults; sooner or later one of them will rupture with an intensity far greater than was experienced in the 1994 Northridge earthquake. That event caused more than \$40 billion of property damage, half of which was due to failures of wood-framed structures.

The San Francisco Bay area, where I live, is threatened by a number of faults,

including the Hayward Fault. The Association of Bay Area Governments predicts that a rupture of the Hayward Fault — with an expected magnitude of 7.2 or greater — will render 150,000 housing units uninhabitable. Other population centers on the West Coast face similar scenarios.

Earthquake retrofitting is the science of attaching a house to its foundation so that when it is violently shaken it remains

standing. I started my seismic retrofit business in 1993 after a couple of stints doing residential earthquake damage assessments as a contract worker for FEMA.

The first was after the 1989 Loma Prieta quake, which caused 67 deaths and some \$7 billion worth of damage in the San Francisco Bay area. The second was in 1992; I did assessments following the Ferndale earthquake on the far north coast of the state.

Seismic Retrofit for Cripple Walls

The Greatest Risk

The most interesting thing I learned doing inspections was how little shaking it takes to destroy or seriously damage a house that is poorly attached to the foundation, especially when it has cripple walls. In many cases, homes fell off their foundations and were damaged so badly they were uninhabitable. Houses that stayed on their foundations typically suffered little more than plaster and drywall cracks.

Cripple walls. Until about 1950, it was the style to build the first floor of West Coast homes a few feet off the foundation by supporting them with short studwalls called cripple walls. Nearly all the houses in the town where I live were built this way. It's easy to tell: If there are more than two or three steps up to the entry door, the house probably has cripple walls. As originally built — with no plywood sheathing — older cripple walls have very little lateral strength, so a good shake can knock them down (see Figure 1).

If you look at photos of houses where the cripple walls collapsed, you'll see that

frequently the house itself remains more or less intact. You might think it would take no great effort to lift a relatively intact house back onto the foundation. But when a house falls, it tears out the plumbing and gas connections, damages the wiring, racks walls out of square, and causes drywall and plaster to loosen or fall off. I've been in many homes where the fall caused cast-iron drain lines to punch up through the building, lifting toilets a couple of feet off the floor.

It's very expensive to repair a fallen house. Frequently it costs nearly as much as building new (Figure 2, facing page).

Fixing the Weakest Link

In many houses, cripple walls and poor foundation connections are the weakest structural links; fix those deficiencies and the house has an excellent chance of surviving even a major earthquake. This doesn't mean the house won't benefit from strengthening the walls above a cripple wall — but the expense is high relative to the benefit.

A good seismic retrofit gives customers a lot of bang for the buck because the

work is concentrated on the weakest part of the building — where the foundation is attached to the first floor.

The average retrofit costs \$6,000, an amount many homeowners are willing to spend to protect their No. 1 investment. We have been retrofitting two homes a week in the Bay area for the past 11 years and always have a backlog of a few months' work.

Building code. The work we do requires a building permit, but surprisingly, the building code offers little guidance on the proper way to retrofit a wood-frame home. The topic is addressed by a single long sentence in Section 3403.2 of the Uniform Building Code. A building official once described the intent of the sentence as the "do no harm" policy, but admitted that in practice it sometimes becomes a "do no good" policy instead.

Currently, stamped engineered drawings are required if you apply for a permit and call the job a seismic retrofit. This nearly doubles the cost of a simple retrofit and discourages many homeowners from having the work done.

Cripple Walls — The Weakest Link

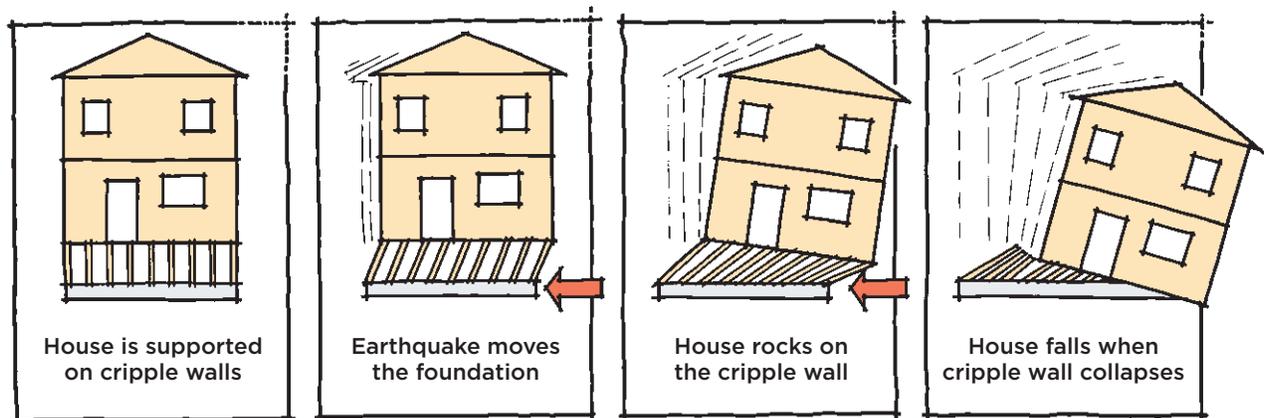


Figure 1. Any house that isn't properly attached to its foundation can slide off in an earthquake. The problem is even

worse when the house is built on cripple walls; it doesn't take much shaking to make cripple walls collapse.

Many contractors get around this by not calling the work a seismic retrofit on the permit application. On these jobs, the homeowners often mistakenly think that the building department is checking to make sure the work will resist earthquakes. But in fact, the inspectors are checking only to see that the plywood and framing hardware are installed to code, not that they are installed in the quantity, size, and location required to resist earthquake forces. Consequently, many of these homes have only partial — or no — protection from seismic forces.

To address problems in the code and make it more affordable to do the work, the city of Berkeley is currently developing the country's first comprehensive seismic retrofit building code. It will be prescriptive, so if the project is simple, there will be no need to hire an engineer.

The Goal of Retrofitting

A single-story 1,000-square-foot house weighs about 50,000 pounds. When that much weight rocks back and forth on top of cripple walls, the cripple walls readily collapse.

Our goal in retrofitting a house is to connect it firmly to the foundation and stiffen the cripple walls by turning all or part of them into shear walls. That way, when an earthquake occurs, the lateral forces are transferred through the shear walls into the foundation.

Shear walls. In a wood-framed house, a shear wall is a studwall that's connected to the foundation with anchor bolts, sheathed with plywood fastened in a tight nailing pattern, and tied to the floor above with shear transfer ties. All three components — foundation bolts, plywood sheathing, and shear transfer ties — must be there for the retrofit to work. If overturning forces are expected — or if the shear wall is tall relative to its width



Figure 2 photos courtesy FEMA

Figure 2. The building at top slid off its foundation during a magnitude-6.5 earthquake in 2004. The house itself is in pretty good shape and would have likely survived unscathed if the cripple walls and foundation attachments had been reinforced. The cripple walls under the house above collapsed during the Northridge earthquake, causing serious structural damage. With damage this severe, it's usually cheaper to tear the house down than to repair it.

— hold-downs are added to this list.

The mudsill and bottom plate can be bolted to the foundation, but if the cripple walls aren't sheathed with plywood, the walls can fail. The bolts and plywood can both be in place, but if the floor isn't properly connected to the wall with shear transfer ties, it may slide sideways in a large earthquake (Figure 3, next page).


How Strong Is Strong Enough?

The big questions are always "How many bolts, how much plywood, and how many shear transfer ties?" To determine the answers, it's necessary to use a simple formula called the base shear formula, which is $V = 0.185 \times W$.


"V" represents the shear force (meas-

Reinforcing Cripple Walls

Floor to Wall Connection

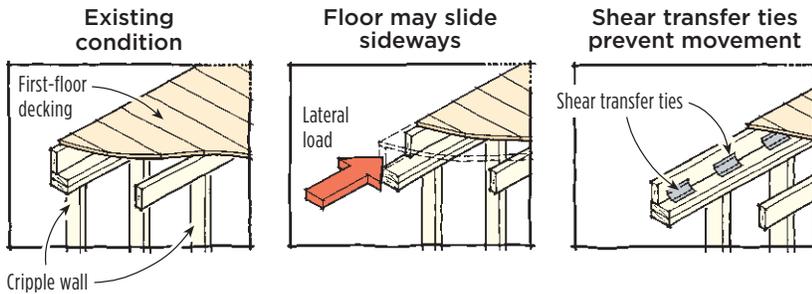

Wall to Mudsill Connection

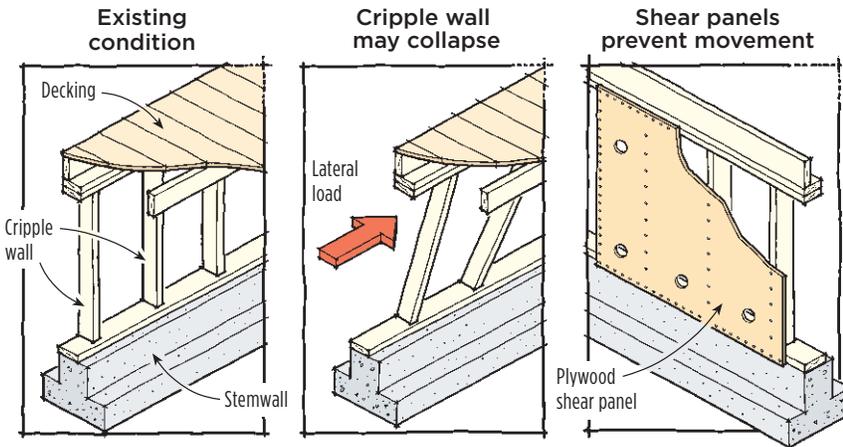

Mudsill to Foundation Connection

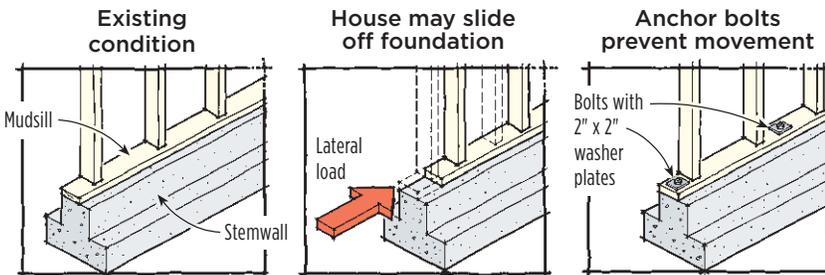


Figure 3. A house with cripple walls must be reinforced at three distinct weak spots below the floor: The floor must be tied to the cripple walls, the cripple walls must be stiffened with plywood and tied to the mudsill, and the mudsill must be bolted to the foundation.

ured in pounds) at the base of a building. The value “0.185” is the anticipated force of ground acceleration from a major earthquake in a particular geographic area. It’s based on proximity to known earthquake faults. You can find out the value for a particular location by calling a structural engineer.

“W” represents the weight of the building. Single-story homes weigh about 50 pounds per square foot. Two-story homes weigh about 80 pounds per square foot of first-floor area.

Designing a Solution

Here’s an example of how to design a retrofit for a house with cripple walls. Let’s say you’re dealing with a one-story house that’s 35 feet by 40 feet, or 1,400 square feet. If we multiply the area by 50 pounds per square foot, we find the building weighs 70,000 pounds. Plugging that number into the base shear formula tells us how much shear force is expected to strike the building at its base:

$$V = \text{base shear force (horizontal to the base of the building)}$$

$$V = 0.185 \times \text{weight of house}$$

$$V = 0.185 \times 70,000 \text{ pounds}$$

$$V = 12,950 \text{ pounds}$$

To simplify, let’s round the number up to 13,000 pounds. A properly designed retrofit for this home must resist at least 13,000 pounds of lateral force at each of the following places: where it sits on the foundation, against cripple walls, and where the floor connects to the cripple walls (Figure 4, facing page).

Overtuning. In addition to resisting lateral shear forces, reinforced cripple walls must resist uplift forces at their ends. Engineers refer to this as overturning, the tendency of tall objects to tip over when you push against them. In an earthquake (or high wind), the house is

pushed back and forth, which pulls up on the ends of shear walls. This is why hold-downs are typically installed at each end of a shear wall — to keep it from “overturning” (Figure 5, next page).

The APA/Engineered Wood Association has tested various shear-wall assemblies and rated them for the amount of lateral force they can resist per lineal foot (plf) of length. These tests form the basis for shear-wall design in U.S. and Canadian building codes. A nominal 1/2-inch plywood shear wall edge-nailed 3 inches on-center with 8d nails has a shear rating of approximately 500 pounds plf.

To calculate the amount of uplift, you multiply the height of the wall (in feet) by the shear rating of the assembly (in pounds plf). The uplift on the end of a wall 8 feet high and rated for 500 pounds of shear will be 4,000 pounds (8 feet x 500 pounds plf).

Calculating uplift gets more complicated, however, because hold-downs must be sized to resist the “net uplift force,” which is uplift less the weight bearing down on the shear wall from above. Fortunately, overturning is rarely a major issue for cripple walls, because they are usually short and tend to slide rather than overturn.

Sliding of the cripple walls, as discussed earlier, can be prevented by installing anchor bolts.

What to Install

Based on our calculations, the house in our example will be attacked by 13,000 pounds of earthquake force in each direction. Retrofitting it will require the following actions.

Anchor bolts. To strengthen the connection between mudsill and foundation, we install anchor bolts (Figure 6, next page). If a bolt is rated to resist 1,000 pounds of shear (its shear value), then we know it will take 13 bolts to protect the

Size of one story house:

$$35' \times 40' = 1,400 \text{ square feet}$$

House weight:

$$1,400 \text{ sqft} \times 50 \text{ lbs/sqft} = 70,000 \text{ pounds}$$

Shear force at base:

$$V = \text{anticipated ground acceleration} \times \text{weight}$$

$$V = .185 \times 70,000 \text{ pounds}$$

$$V = 12,950 \text{ pounds (round up to 13,000)}$$

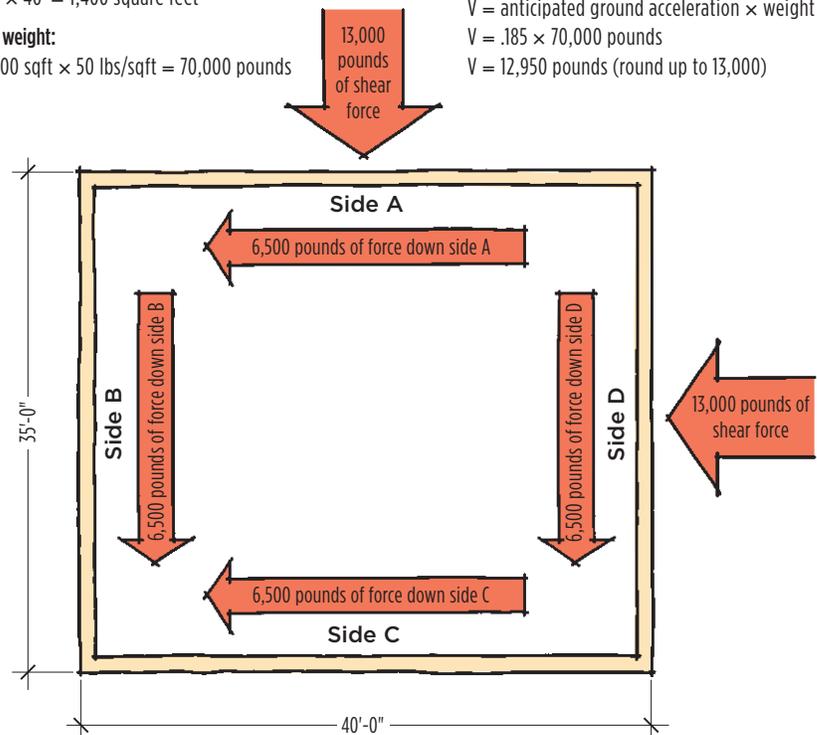


Figure 4. The heavier the house, the greater the lateral forces that must be transferred to the foundation in an earthquake. Here, forces are shown from only two directions, but they can come from any direction, so the cripple walls and foundation must be equally reinforced on all sides.

house in the north-south direction and 13 to protect it east-west. The bolts should be divided between opposing sides. Since you can't install half a bolt, we would round up to 14 and install seven bolts on each side of the foundation wall.

Shear transfer ties. The same method is used to calculate the number of shear transfer ties needed to attach joists to the top plate of the cripple wall. We typically

use Simpson H10R ties for this connection (Figure 7, next page). Their shear value is shown in the column labeled 1.33/1.60 in the Simpson Strong-Tie catalog (www.strongtie.com). This particular column refers to short-duration lateral loads caused by wind and earthquakes. The H10R ties resist about 500 pounds of lateral force, so we would need 26 in each direction, or 13 per wall.

Plywood bracing. To brace the cripple

Seismic Retrofit for Cripple Walls



Figure 5. Now that hold-downs are installed, this wall will be sheathed with plywood and turned into a shear wall. The hardware is necessary where a wall is tall enough that overturning forces could result in uplift. It isn't needed on shorter cripple walls.

ple walls, we typically sheath them with plywood from inside the crawlspace (Figure 8, facing page). If the shear-wall configuration (plywood and nailing pattern) is rated to resist 500 pounds plf, then we need 26 lineal feet of plywood on the east-west and north-south walls. Since this bracing is divided between opposing walls, each side gets 13 feet of plywood.

If the calculations showed net uplift from the overturning force, we would install a hold-down at each end of all shear walls. However, the strength of the hold-down is rarely an issue. The weak link is usually the old unreinforced concrete foundation; if the uplift force is large enough (more than 2,000 pounds) it may pull out the retrofit hold-down bolt, rendering it useless. One solution

— an expensive one — is to shore up the building and replace that section of foundation, but it's often simpler to pour a new footing alongside the old one and install the hold-downs in it (Figure 9, facing page).

Anchor-bolt spacing. It's a common mistake to space new anchor bolts evenly around the building. That approach is fine when joists land on the mudsill, but when you turn a cripple wall into a shear wall, those bolts need to be installed where the plywood panels are. We install them every 2 feet at shear-wall locations. The shear transfer ties can be anywhere along the wall; we install them near the plywood because we're already working there.

Types of Foundation Bolts

There are two kinds of bolts for retrofitting: mechanical wedge anchors and epoxy bolts. Testing has shown that they are equally effective in resisting lateral shear forces.

Wedge anchors. Wedge anchors are cheaper and easier to install, so that's what we use — unless the concrete is so porous the anchors won't grab. If that's the case, we switch to epoxy bolts. Our favorite wedge anchors are Hilti's 7-



Figure 6. The author's crew typically adds anchor bolts to prevent mudsills from sliding horizontally in an earthquake. Bolts perform better when they are installed with 2-inch-by-2-inch washer plates.



Figure 7. When this house was built, the joists were simply toenailed to the top plate. As part of the retrofit, the crew fastened the joists with shear transfer ties — H10Rs — and the locking between them with L90s.

inch-long Kwik Bolts. They're simple and easy to install: Drill a hole in the concrete, hammer in the bolt, and tighten it with a wrench.

Epoxy anchors. Epoxy anchors are more complicated. The holes they go into must be brushed clean with a bottlebrush and blown out with compressed air before the bolt can be installed (Figure 10, next page). We use 1/2-inch all-thread for the bolt and glue it in with Hilti's HY 150 epoxy. The all-thread must penetrate at least 4 inches into the concrete — more if the concrete is weak. The HY 150 cures quickly (in about an hour), so you can tighten the nuts and install plywood right away.

Epoxy bolts resist withdrawal better than wedge anchors, which is why hold-down bolts are always epoxied in.

The building code does not permit 1/2-inch anchor bolts in new construction, but we find they are a superior product for retrofit work. They're almost as strong as 5/8-inch bolts, but they're easier to install and — since there are more of them — they distribute loads more evenly.

Whatever the bolt size, use 2-inch-by-2-inch plate washers; they greatly increase bolt performance.

Alternate fastening method. If the crawlspace is high enough, we make holes for anchor bolts by drilling down through the mudsill with a rotary hammer. When space is tight, we make the connection from the side using Simpson UFP10 retrofit foundation plates. These plates are rated for 1,340 pounds of shear resistance and require five screws into the mudsill and two anchor bolts into the foundation (Figure 11, page 101).

Many contractors worry that old concrete is weak because it contains no reinforcing steel. The Structural Engi-



Figure 8. With the anchor bolts and framing hardware installed, this carpenter finishes the job by sheathing the cripple wall with plywood. For best results, use at least 15/32 Structural 1-grade 5-ply plywood.



Figure 9. The foundation under this shear wall can support the vertical load but is too weak and shallow to accept hold-downs. Instead of replacing it, the author poured a new reinforced footing alongside the existing one. To tie into the new footing, the hold-downs and anchor bolts are on the interior face of the wall and attached through a “reversed” mudsill. The crew nailed the plywood to the back of the mudsill before standing it up and nailing it to the studs.

Seismic Retrofit for Cripple Walls

neers Association of Northern California did some tests in 1992 and discovered that even 1,500-psi unreinforced concrete performed just fine against shear. In the tests it was always the wood that failed in shear — not the concrete.

Installing Shear Transfer Ties

We install shear transfer ties to connect the top of the cripple wall to the joists above. The ties go on before the plywood so that we can attach them directly to framing.

When the joists are perpendicular to cripple walls, we attach them with Simpson H10Rs. When the joists are parallel, we use Simpson L90s. Whenever possible, we use a metal connector nailer to drive the fasteners. Since space is often tight, we frequently use palm nailers.



Figure 10. After drilling a hole for a hold-down, a carpenter blows it clean with compressed air (top left). He knocks loose material from the sides by reaming it with a long wire brush (top right), then blows it out again. He finishes by pumping two-part epoxy into the hole (above left) and inserting a length of threaded rod (above right). Once the epoxy sets, he will bolt in the hold-down and sheathe the wall with plywood.

Prepping the Cripple Walls

There's a glitch in most model codes: When shear capacity exceeds 350 pounds plf, they require 3-inch nominal studs at panel edges. We typically sister on a second stud where panel edges land because it's easier than installing 3x4s; also, APA testing has shown that a double 2x4 is just as strong. For more on this, see Technical Topic TT-076 on the APA Web site (www.apawood.org).

Flush cutting. In most APA tests of shear walls, the sheathing is nailed onto top plates, 2x4 studs, and a continuous 2x4 bottom plate. But older cripple walls are built with 2x4 studs on a 2x6 mudsill, which is also the bottom plate.

To provide nailing for the bottom edge of the plywood, most retrofit contractors run 2x4 blocks between the studs and nail them like crazy to the mudsill. The problem is that the APA has never tested this configuration, and the short blocks tend to split when you put in a lot of nails.

Our solution is to trim the mudsill back so it's flush with the studs (Figure 12, facing page). This is hard to do with a framing saw because the studs get in the way, so we use a saw equipped with a \$100 flush-cutting attachment called a FlusSa, which is available from Clemenson Enterprises Inc. (CEI, 800/333-5234, www.cei-clem.com). The company also sells a complete saw, the CloseCut, for \$150.

Staples. Sometimes there is no alternative to adding blocks. For example, in the old days mudsills (which were made from redwood) were occasionally embedded

Figure 11. Since there isn't clearance to install anchor bolts from above, a carpenter installs Simpson UFP10 retrofit plates instead. He screws the connector to the mudsill (right), drills sideways into the foundation through holes in the plate, hammers in the anchors, and then tightens the nuts with a wrench (far right). The angle iron on the right, which is bolted to the foundation and joist, is from an ineffective 1980s retrofit.



in the concrete flush with the top of the foundation. Under these circumstances, we block between studs but fasten the blocks with 2½-inch 15-gauge staples. Each staple will resist about 80 pounds of lateral force.

It takes a lot of staples, but they won't split the blocks.

Putting Up Plywood

To complete the shear wall, we nail plywood to selected segments of the cripple wall with 8d nails in a specific nailing pattern. It's important to use the correct plywood. The former head of the Los Angeles retrofit program said that after Northridge he saw houses in which cheap three-ply material actually tore.

For strong shear walls, use 15/32 Structural 1 5-ply plywood. If you install this material with 8d common nails (0.131 inch by 2½ inches) 2 inches o.c. at the edges and 12 inches o.c. in the field, it has a shear rating of 730 pounds plf.

You can get an even stronger wall (with the same nailing) using ¾-inch plywood.

Howard Cook owns Bay Area Retrofit in Berkeley, Calif.



Figure 12. Using a saw equipped with a flush-cutting attachment (left), a carpenter trims the mudsill back to the stud plane (below). This makes for a stronger shear wall because the bottom edge of plywood nails directly to the mudsill. The alternative is to nail the plywood to short blocks installed between the studs.

