



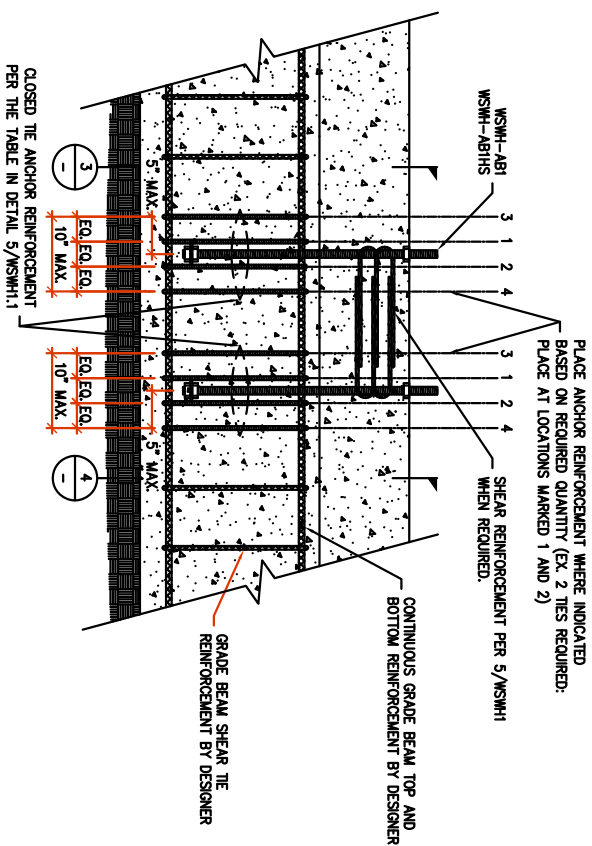



NOTES :
ANCHOR REINFORCEMENT IS FOR ANCHORAGE ONLY. GRADE BEAM DESIGN (SIZE AND REINFORCEMENT) BY DESIGNER.

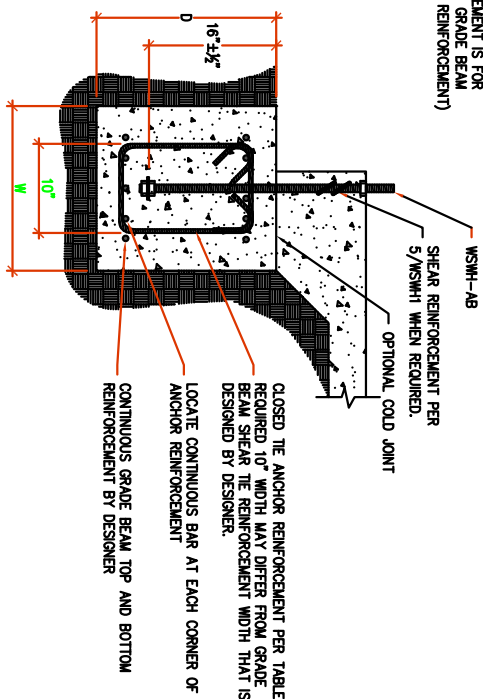

ANCHOR REIN. NOTE :
MINIMUM DISTANCES FROM THE ANCHOR
BOLT PLATE WASHER TO TOP AND
BOTTOM OF CLOSED IE REINFORCEMENT
ARE 15" AND 5" RESPECTIVELY.

DIMENSIONING NOTES :
D: DEPTH BY DESIGNER (24" MIN.)
W: WIDTH BY DESIGNER (18" MIN.)

DIMENSIONING NOTES :
D: DEPTH BY DESIGNER (24" MIN.)
W: WIDTH BY DESIGNER (18" MIN.)

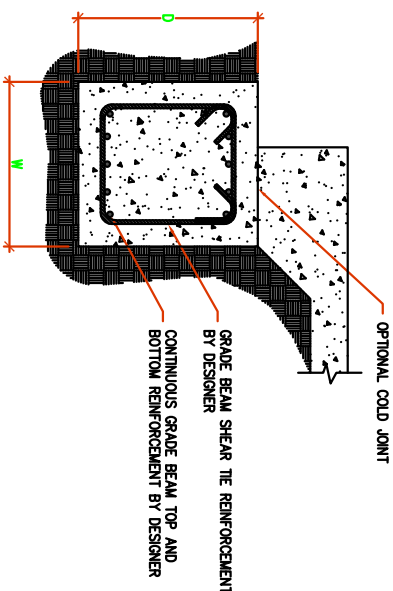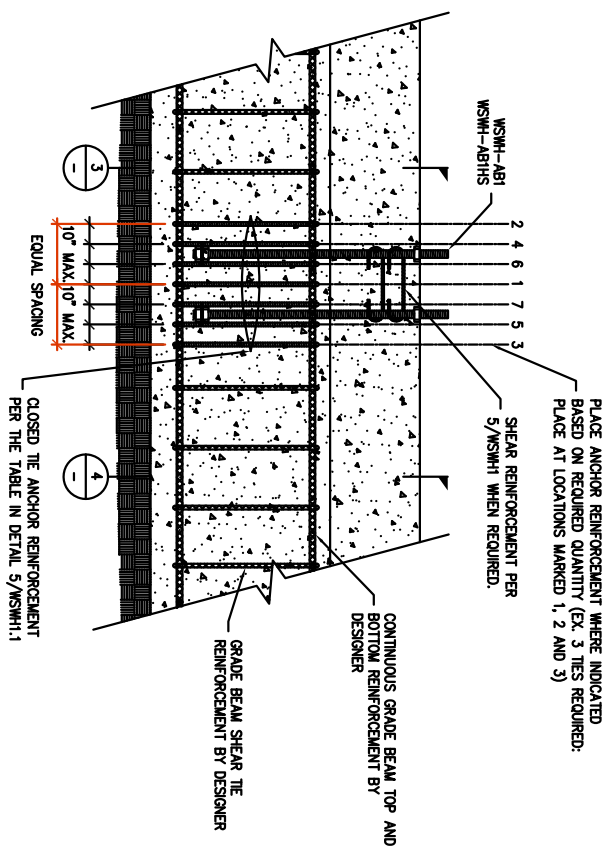

DIMENSIONING NOTES:
D: DEPTH BY DESIGNER (24" MIN.)
W: WIDTH BY DESIGNER (18" MIN.)

