


- 1 holddown
- 2 holddown bolt
- 3 anchor bolt
- 4 15/32 5-ply structural 1 plywood, nailed 2" apart on edges, 12" apart in field.
- 5 1-1/8" ventilation holes
- 6 double studs at plywood joint location, nailed with 12d commons, 3" apart, staggered.
- 7 double stud at holddown location, nailed with 12d commons, 3" apart, staggered.

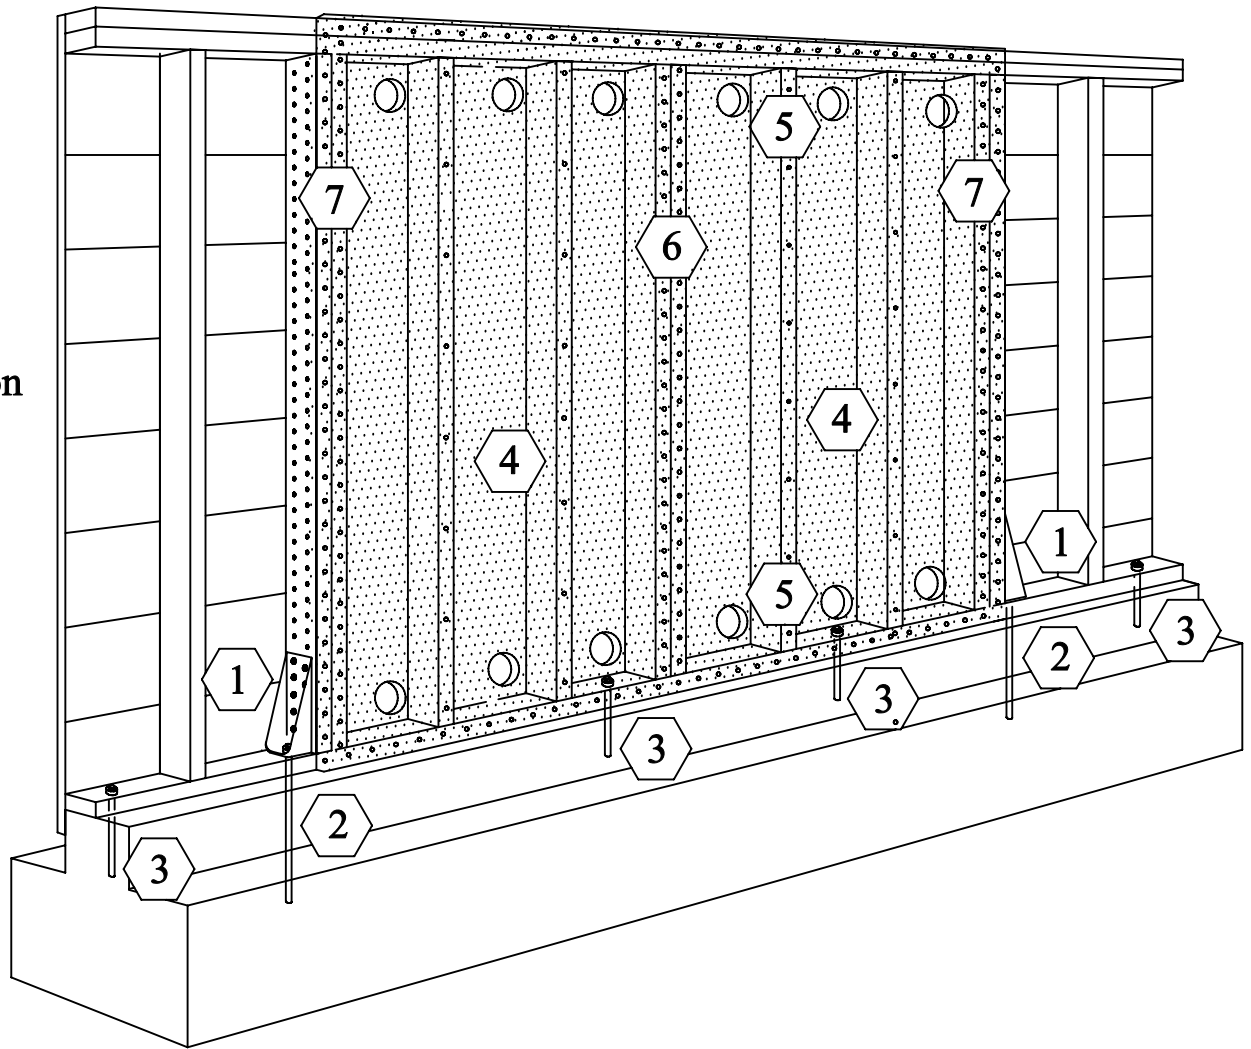

## Structural Components of a Shear Wall

Shear Wall - structural components